




Attributes

Highlights	Description
<ul style="list-style-type: none"> ▪ High repeatability ▪ Vacuum suitable lubrication ▪ Zero backlash with optimised fit between speed and resolution ▪ Easy controllability ▪ Preloaded ball bearing 	<p>The MaalonDrive® UHV 10mm - type 6 micro positioning system, designed for applications in ultra-high-vacuum environments and therefore lubricated with Fomblin, is characterised by its extremely short length. The combination of a zero-backlash MaalonDrive® gear with a reduction ratio of 160:1 with a flat EC motor with rated voltage of 6V results in a high-performance and space-optimised micro positioning system. Preloaded ball bearings mounted on the output side allow the application to be directly connected.</p>


Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com. For further information please contact sales@micromotion.de.

P-019

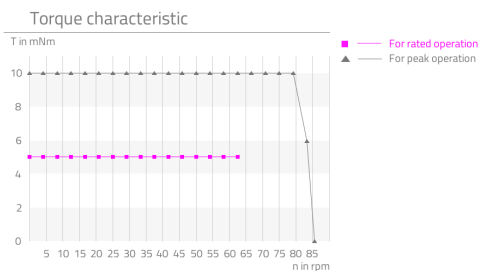

P-029

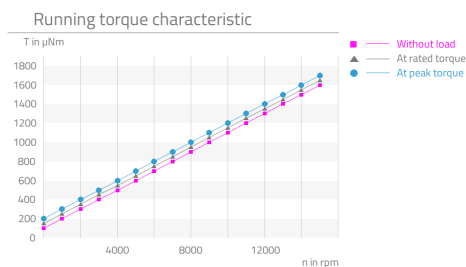

Technical Supply Specifications: MaalonDrive® UHV 14mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-001	Vacuum suitable		HV	
P-003	Ratio	i	160 : 1	
P-004	Self-locking		yes	
P-008	Repeatability unidirectional		22.5 arcsec	
P-009	Repeatability bidirectional		30 arcmin	
P-010	Accuracy		12 arcmin	
P-011	Transmission accuracy		24 arcmin	
P-013	Torsional stiffness		8.25 $\frac{\text{Nm}}{\text{rad}}$	
P-014	Lost motion		18 arcmin	
P-015	Backlash		0 arcmin	
P-016	Rated torque	T	5 mNm	
P-017	Peak torque	T	10 mNm	
P-018	Momentary peak torque	T	23 mNm	
P-021	Rated input speed	n	10000 rpm	
P-022	Maximum input speed	n	22000 rpm	
P-023	Rated output speed	n	62.5 rpm	
P-024	Maximum output speed	n	137.5 rpm	
P-026	No-load starting torque	T	150 μNm	
P-027	No-load running torque	T	100 μNm	
P-028	Rated running torque	T	1200 μNm	
P-034	Lifetime for rated operation		500 h	
P-035	Radial backlash output shaft		0 μm	
P-036	Axial backlash output shaft		0 μm	
P-037	Radial stiffness	c	2.31 N/ μm	
P-038	Axial stiffness	c	40 N/ μm	
P-039	Max. radial load on output shaft (non-operating, constant load)	F	55 N	
P-040	Max. radial load on output shaft (non-operating, impulsive load)	F	20 N	
P-041	Max. radial load on output shaft (operating, constant load)	F	7 N	
P-042	Max. radial load on output shaft (operating, impulsive load)	F	7 N	
P-043	Max. axial load on output shaft (non-operating, constant)	F	150 N	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	

Technical Supply Specifications: MaalonDrive® UHV 14mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-045	Max. axial load on output shaft (operating, constant load)	F	380 N	
P-046	Max. axial load on output shaft (operating, impulsive load)	F	127 N	
P-055	Moment of inertia	I	$11023 * 10^{-4}$ gcm ²	
P-056	Weight	m	12 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-40 °C	
P-058	Min. permissible ambient temperature (operating)	T	-10 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	125 °C	
P-060	Max. permissible ambient temperature (operating)	T	100 °C	

Motor data: EC-Motor EC 14 flat 6V

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-100	Motortype		EC	
P-102	Maximum speed of motor	n	22000 rpm	
P-104	Speed constant of motor	Kn	$3770 \frac{\text{rpm}}{\text{V}}$	
P-106	Stall torque of motor	T	3.79 mNm	
P-107	Torque constant of motor	Km	$2.53 \frac{\text{mNm}}{\text{A}}$	
P-108	No-load current of motor	I	156 mA	
P-110	Max. continuous current of motor	I	794 mA	
P-111	Rated voltage of motor	U	6 V	
P-112	Phase resistance of motor	R	4.01 ohm	
P-113	Inductance of motor	L	0.107 mH	
P-114	Amplitude BEMF of motor	U	$0.265 \frac{\text{mV}}{\text{rpm}}$	
P-118	Max. coil temperature of motor	T	125 °C	
P-119	Thermal resistance of motor between coil and housing	R _{th1}	$11.3 \frac{\text{K}}{\text{W}}$	
P-120	Thermal resistance of motor between housing and air	R _{th2}	$11.6 \frac{\text{K}}{\text{W}}$	
P-121	Thermal time constant of the coil of the motor	T _{w1}	1370 ms	
P-122	Thermal time constant of the housing of the motor	T _{w2}	49200 ms	

Technical Supply Specifications: MaalonDrive® UHV 14mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Material information


Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		FomblinGRM60	
P-903	Lubrication of gear component set		FomblinGRM60	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-911	Material of bearing motor		Stainless steel	
P-912	Material of gearbox output side		1.4305 DIN EN	
P-914	Material of motor housing		Aluminium	

Technical Supply Specifications: MaalonDrive® UHV 14mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Technical drawing

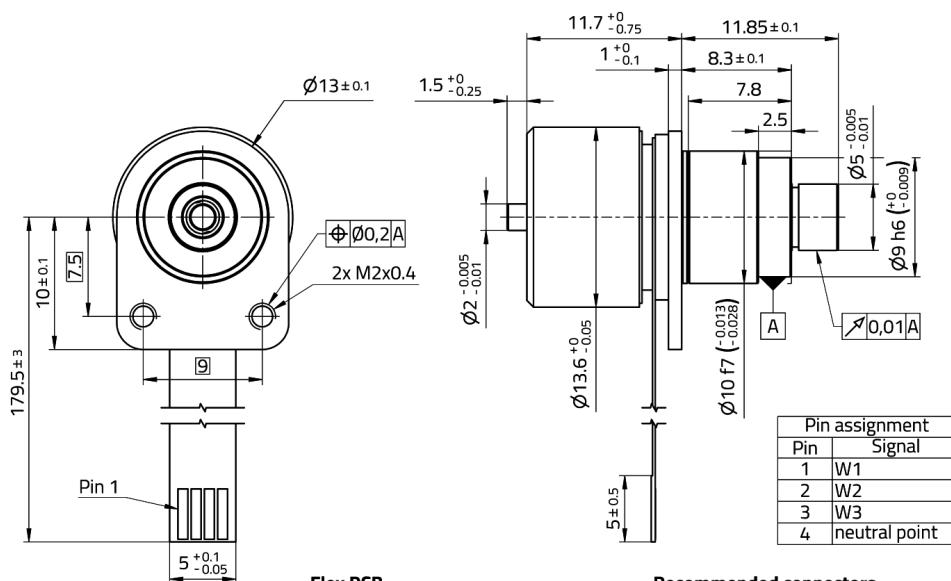

Flex PCB
 Thickness: 0,1mm
 Bending radius 1mm min.
 Thickness of pads area (stiffener)
 0,3mm (±0,05), not flexible

Recommended connectors
 Molex 52207-0433 or Tyco 84953-4



Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg
 +49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com