



Attributes


Highlights	Description
<ul style="list-style-type: none">▪ Compact build up▪ High speed▪ Integrated limit switches▪ Adapter with cylindrical surface▪ Easy controllability	<p>The RasuunDrive® HighSpeed 10mm - type 8 micro positioning system has a travel range of 6 mm. The system is driven by a EC motor with a integrated encoder. Directly connected to the motor is a low-backlash CoograDrive® gear with a reduction ratio of 40:1 and a spring-loaded, zerobacklash spindle nut system with a pitch of 0.4 mm. The end positions are monitored by two magnetoresistive limit sensors. The mechanical interface for attaching the micro linear actuator system is a 6 g6 cylinder surface; the load is connected via an M3x3.5 thread.</p>

Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com.

For further information please contact sales@micromotion.de.

P-019

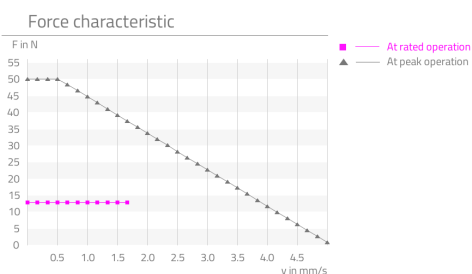

Nr.	Parameter	Symbol	Value	Hint
P-003	Ratio	i	40 : 1	
P-004	Self-locking		yes	
P-005	Travel range	s	6 mm	
P-008	Repeatability unidirectional		1 µm	
P-009	Repeatability bidirectional		5 µm	
P-010	Accuracy		12 µm	
P-012	Resolution		0.00977 µm	
P-014	Lost motion		5 µm	
P-015	Backlash		0 µm	
P-016	Rated force	F	12.8106 N	
P-017	Peak force	F	50 N	
P-018	Momentary peak force	F	50 N	
P-023	Rated speed	v	1.66667 $\frac{\text{mm}}{\text{s}}$	
P-024	Maximum speed	v	5 $\frac{\text{mm}}{\text{s}}$	
P-034	Lifetime for rated operation		1000 h	
P-035	Radial backlash output shaft		0 µm	
P-036	Axial backlash output shaft		0 µm	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	

Technical Supply Specifications: RasuunDrive® HighSpeed 10mm - Type 8



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-055	Moment of inertia	I	$660.05 \cdot 10^{-4}$ gcm ²	
P-056	Weight	m	24 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-40 °C	
P-058	Min. permissible ambient temperature (operating)	T	-20 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	125 °C	
P-060	Max. permissible ambient temperature (operating)	T	100 °C	

Motor data: EC-Motor 1028S006B

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-100	Motortype		EC	
P-102	Maximum speed of motor	n	79000 rpm	1)
P-104	Speed constant of motor	Kn	5426 rpm/V	
P-106	Stall torque of motor	T	9.72 mNm	
P-107	Torque constant of motor	Km	1.76 mNm/A	
P-108	No-load current of motor	I	121 mA	
P-110	Max. continuous current of motor	I	1160 mA	2)
P-111	Rated voltage of motor	U	6 V	
P-112	Phase resistance of motor	R	1.08 ohm	
P-113	Inductance of motor	L	0.024 mH	
P-114	Amplitude BEMF of motor	U	0.184 mV/rpm	
P-118	Max. coil temperature of motor	T	125 °C	
P-119	Thermal resistance of motor between coil and housing	R _{th1}	6.6 K/W	1)
P-120	Thermal resistance of motor between housing and air	R _{th2}	42.4 K/W	
P-121	Thermal time constant of the coil of the motor	T _{w1}	4200 ms	1)
P-122	Thermal time constant of the housing of the motor	T _{w2}	152000 ms	

Technical Supply Specifications: RasuunDrive® HighSpeed 10mm - Type 8



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Encoder data

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-201	Impulses per revolution of encoder		1024	
P-202	Channels of encoder		A, B, I	
P-203	Frequency range of encoder	f	500 kHz	
P-204	Operating voltage of encoder	U	5 ±0.5 V	
P-205	Rated current consumption of encoder	I	max. 23	3)
P-206	Output current of encoder	I	4 mA	4)
P-207	Signal/phase shifting of encoder		90±75 °	5)
P-208	Signal build-up/decay time of encoder	t	0.1/0.1	

Data limit switch

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-302	Configuration Limit switches		n.c.	

Spindle data: Precision spindle m 2x0.4 – 6 mm travel range

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-402	Pitch	R	0.4 mm	

Material information

Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		Longtime PD2	
P-903	Lubrication of gear component set		Molykote BR 2 plus	
P-905	Lubrication of spindel-nut-system		Fomblin GRM60	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-912	Material of gearbox output side		1.4305 DIN EN	

Technical Supply Specifications: RasuuDrive® HighSpeed 10mm - Type 8




Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-914	Material of motor housing		Aluminium	
P-917	Material of spindle		1.4305 DIN EN	

- 2) Curve measured with nominal voltage and load inertia $6 \cdot 10E-9 \text{ kg/m}^2$ in $\frac{1}{2}$ micro steps.
- 3) Supply = 5V; unloaded outputs
- 4) Supply = 5V; low logic level $<0.4V$, high logic level $>4.5V$; CMOS and TTL compatible
- 5) At 5000 rpm

Technical drawing

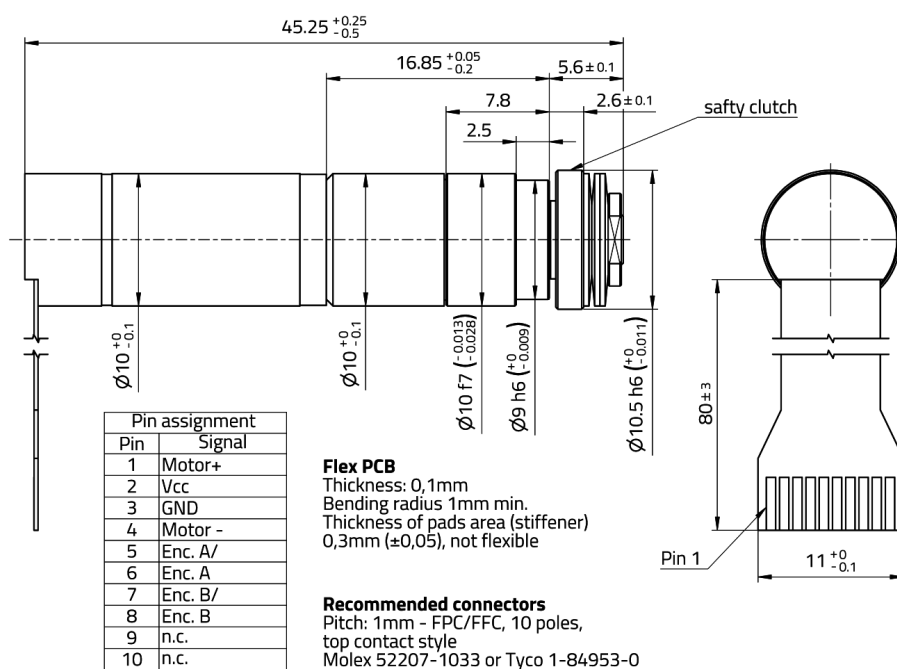

Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg

+49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com