




Attributes

Highlights	Description
<ul style="list-style-type: none">▪ Zero backlash at ultra high resolution▪ Dry lubrication due to coatings▪ Suitable in wide temperature range▪ Step with in the range of nm▪ Robust control without feedback system	<p>Thanks to the dry lubrication and the materials that are used, the KeevoDrive® HighVac 10mm - type 1 is especially well suited for applications in extreme environmental conditions. The positioning unit is driven by a stepper motor with 20 steps per rotation, which allows the system to be operated in a simple, open loop control.</p> <p>The micro positioning system relies on an eccentric with eccentricity of 2000 µm, thereby making possible a travel range of up to 4000 µm. Compact, reliable and equipped with a zero-backlash MaalonDrive® gear with reduction ratio of 1000:1 at the core of the system.</p>


Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com.
For further information please contact sales@micromotion.de.


P-005

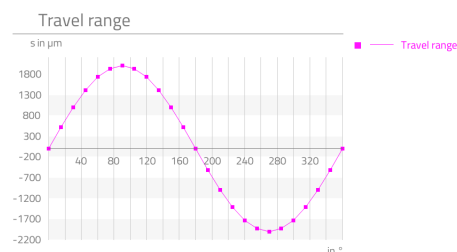


P-008

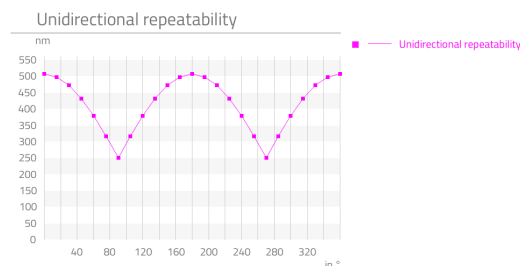


P-009

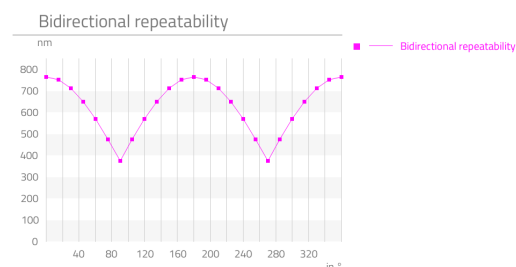


P-012

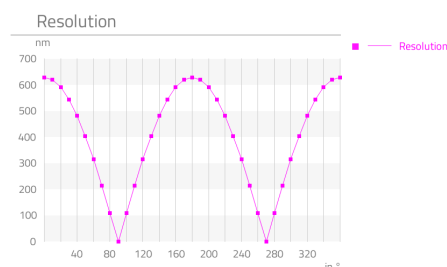


P-016

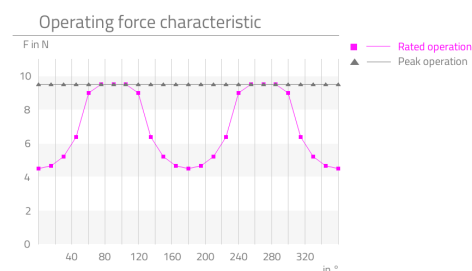

P-502

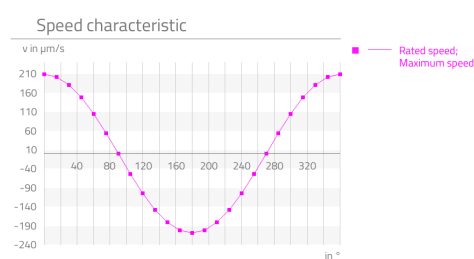

P-512

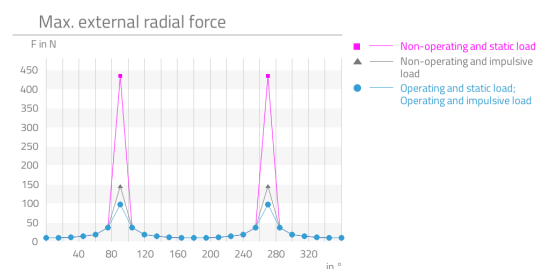

Technical Supply Specifications: KeevoDrive® HighVac 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-001	Vacuum suitable		UHV	
P-003	Ratio	i	1000 : 1	
P-004	Self-locking		yes	
P-005	Max. travel range	s	4000 µm	
P-014	Lost motion		23.336 µm	
P-015	Backlash		0 µm	
P-016	Rated force	F	4.5 N	
P-017	Peak force	F	9.5 N	
P-018	Momentary peak force	F	23.5 N	
P-034	Lifetime for rated operation		200 h	
P-035	Radial backlash output shaft		0 µm	
P-036	Axial backlash output shaft		0 µm	
P-037	Radial stiffness	c	69.13 N/µm	
P-038	Axial stiffness	c	40 ^N /µm	
P-039	Max. radial load on output shaft (non-operating, constant load)	F	435 N	
P-040	Max. radial load on output shaft (non-operating, impulsive load)	F	145 N	
P-041	Max. radial load on output shaft (operating, constant load)	F	98 N	
P-042	Max. radial load on output shaft (operating, impulsive load)	F	98 N	
P-043	Max. axial load on output shaft (non-operating, constant load)	F	150 N	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	
P-045	Max. axial load on output shaft (operating, constant load)	F	380 N	
P-046	Max. axial load on output shaft (operating, impulsive load)	F	127 N	
P-055	Moment of inertia	I	955 * 10 ⁻⁴ gcm ²	
P-056	Weight	m	26 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-35 °C	
P-058	Min. permissible ambient temperature (operating)	T	-35 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	130 °C	
P-060	Max. permissible ambient temperature (operating)	T	70 °C	

Technical Supply Specifications: KeevoDrive® HighVac 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
-----	-----------	--------	-------	------

Additional technical data:

- AWG28, 4 leads, 500mm, pitch 1.27mm

Motor data: Stepper AM 1020-2R-A-0.25-8-10/1977

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-100	Motortype		Stepper	
P-102	Maximum speed of motor	n	21000 rpm	
P-103	Resonance frequency of motor	f	140 Hz	
P-105	Holding torque of motor (unpowered)	T	0.2 mNm	
P-109	Rated current of motor	I	250 mA	
P-111	Rated voltage of motor	U	2 V	
P-112	Phase resistance of motor	R	8 ohm	
P-113	Inductance of motor	L	2.4 mH	
P-114	Amplitude BEMF of motor	U	0.6 mV/rpm	
P-115	Full step angle of motor		18 °	
P-116	Angular accuracy of step of motor		±1.8 °	
P-117	Electrical time constant of motor	t	0.32 ms	
P-118	Max. coil temperature of motor	T	130 °C	
P-119	Thermal resistance of motor between coil and housing	R _{th1}	3.9 ^K /W	
P-120	Thermal resistance of motor between housing and air	R _{th2}	53.8 ^K /W	
P-121	Thermal time constant of the coil of the motor	T _{w1}	3200 ms	
P-122	Thermal time constant of the housing of the motor	T _{w2}	200000 ms	
P-123	Insulation voltage of motor	U	200 V	

Excenter data

Nr.	Parameter	Symbol	Value	Hint
P-501	Eccentricity		2000 µm	
P-504	Max. radial load on eccentric bearing (non-operating, constant load)	F	9.5 N	
P-505	Max. radial load on eccentric bearing (non-operating, impulsive load)	F	9.5 N	

Technical Supply Specifications: KeevoDrive® HighVac 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-506	Max. radial load on eccentric bearing (operating, constant load)	F	9.5 N	
P-507	Max. radial load on eccentric bearing (operating, impulsive load)	F	9.5 N	
P-508	Max. axial load on eccentric bearing (non-operating, constant load)	F	150 N	
P-509	Max. axial load on eccentric bearing (non-operating, impulsive load)	F	50 N	
P-510	Max. axial load on eccentric bearing (operating, constant load)	F	380 N	
P-511	Max. axial load on eccentric bearing (operating, impulsive load)	F	127 N	
P-513	Eccentricity error		20 µm	

Material information


Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		MoS ₂ (drylubrication)	
P-902	Lubrication of input bearing gearbox		MoS ₂ (drylubrication)	
P-903	Lubrication of gear component set		DICRONITE®/MoS ₂ (drylubrication)	
P-904	Lubrication of bearing motor		MoS ₂ (drylubrication)	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-910	Material of input bearing gearbox		1.4108 DIN EN	
P-911	Material of bearing motor		Stainless steel	
P-912	Material of gearbox output side		1.4305 DIN EN	
P-914	Material of motor housing		Anodized aluminum	
P-915	Material of eccentric bearing		1.4108 DIN EN	

Technical Supply Specifications: KeevoDrive® HighVac 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Technical drawing

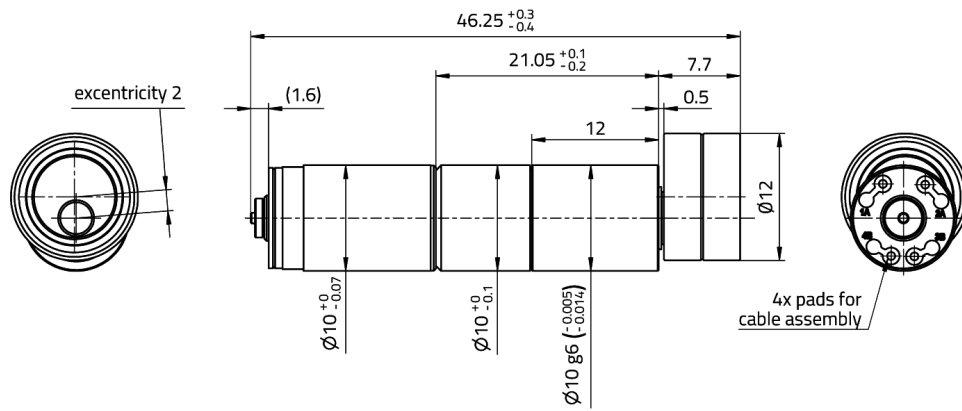

Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg
+49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com