



## Attributes


Highlights	Description
<ul style="list-style-type: none"> <li>▪ <b>Flexible integration</b></li> <li>▪ <b>Preloaded ball bearing</b></li> <li>▪ <b>Robust control without feedback system</b></li> <li>▪ <b>Ball screw</b></li> <li>▪ <b>Transmission ratio optimized to torque</b></li> </ul>	<p>The RasuunDrive® BallScrew 10mm - type 3 provides a travelrange of up to 5 mm. This is possible thanks to the combination of a stepper motor (20 steps per rotation) with a sturdy, low backlash CoograDrive® gear and a ball screw. The CoograDrive® gear comes with a reduction ratio of 80:1, directly integrated in the bearing of the gear output shaft is the ball screw with a pitch of 1 mm.</p>

## Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at [www.micromotion-drives.com](http://www.micromotion-drives.com).

For further information please contact [sales@micromotion.de](mailto:sales@micromotion.de).

P-019 Curve measured with 5x nominal voltage and load inertia  $6 \cdot 10E-9 \text{ kg/m}^2$  in  $\frac{1}{4}$  micro steps.

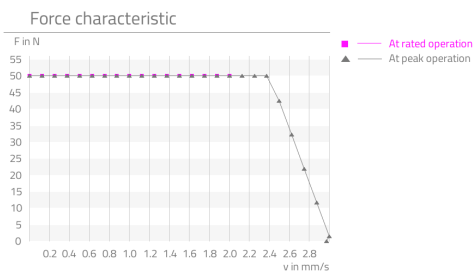

# Technical Supply Specifications: RasuunDrive® BallScrew 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-003	Ratio	i	80 : 1	
P-004	Self-locking		yes	
P-005	Travel range	s	5 mm	
P-008	Repeatability unidirectional		0.5 µm	
P-009	Repeatability bidirectional		2 µm	
P-010	Accuracy		20 µm	
P-012	Resolution		0.625 µm	
P-014	Lost motion		10 µm	
P-015	Backlash		5 µm	
P-016	Rated force	F	50 N	
P-017	Peak force	F	50 N	
P-018	Momentary peak force	F	50 N	
P-023	Rated speed	v	2.08333 $\frac{\text{mm}}{\text{s}}$	
P-024	Maximum speed	v	4.375 $\frac{\text{mm}}{\text{s}}$	
P-034	Lifetime for rated operation		1000 h	
P-035	Radial backlash output shaft		0 µm	
P-036	Axial backlash output shaft		0 µm	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	
P-055	Moment of inertia	I	938.01 * 10 <sup>-4</sup> gcm <sup>2</sup>	
P-056	Weight	m	16 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-35 °C	
P-058	Min. permissible ambient temperature (operating)	T	-20 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	130 °C	
P-060	Max. permissible ambient temperature (operating)	T	70 °C	

## Motor data: Stepper AM 1020-2R-A0.25

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-100	Motortype		Stepper	
P-102	Maximum speed of motor	n	21000 rpm	
P-103	Resonance frequency of motor	f	140 Hz	

# Technical Supply Specifications: RasunDrive® BallScrew 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-105	Holding torque of motor (unpowered)	T	0.2 mNm	
P-109	Rated current of motor	I	250 mA	
P-111	Rated voltage of motor	U	2 V	
P-112	Phase resistance of motor	R	8 ohm	
P-113	Inductance of motor	L	2.4 mH	
P-114	Amplitude BEMF of motor	U	0.6 mV/rpm	
P-115	Full step angle of motor		18 °	
P-116	Angular accuracy of step of motor		±1.8 °	
P-117	Electrical time constant of motor	t	0.32 ms	
P-118	Max. coil temperature of motor	T	130 °C	
P-119	Thermal resistance of motor between coil and housing	R <sub>th1</sub>	3.9 <sup>°C</sup> /W	
P-120	Thermal resistance of motor between housing and air	R <sub>th2</sub>	53.8 <sup>°C</sup> /W	
P-121	Thermal time constant of the coil of the motor	τ <sub>w1</sub>	3200 ms	
P-122	Thermal time constant of the housing of the motor	τ <sub>w2</sub>	200000 ms	
P-123	Insulation voltage of motor	U	200 V	

Spindle data: Ball screw 1112./1.3.20.24 t5 – 5 mm travel range  
(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-402	Pitch	R	1 mm	

## Material information

Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		Longtime PD2	
P-903	Lubrication of gear component set		Molykote BR 2 plus	
P-904	Lubrication of bearing motor		Synthetic light ester oil	
P-905	Lubrication of spindel-nut-system		Braycote 601EF	
P-908	Material of gear component set		NiFe	

# Technical Supply Specifications: RasunDrive® BallScrew 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-911	Material of bearing motor		Stainless steel	
P-912	Material of gearbox output side		1.4305 DIN EN	
P-914	Material of motor housing		Anodized aluminum	
P-917	Material of spindle		1.4034	

## Technical drawing

