

> RasuunDrive®

BallScrew 10mm - Type 14

Attributes


Highlights	Description
▪ Flexible integration ▪ Vacuum suitable lubrication ▪ Ball screw ▪ Zero backlash with speed optimised transmission ratio ▪ Easy controllability	The RasuunDrive® BallScrew 10mm - type 14 provides an impressive travelrange of up to 20 mm. This is possible thanks to the combination of a EC Motor, an encoder with 1024 Impulses per revolution and with a sturdy, zero backlash MaalonDrive® gear and a ball screw. The MaalonDrive® gear comes with a reduction ratio of 120:1, directly integrated in the bearing of the gear output shaft is the ball screw with a pitch of 1 mm.

Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com.

For further information please contact sales@micromotion.de.

P-019

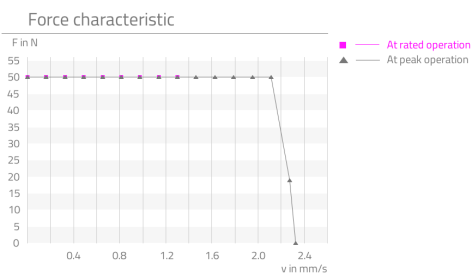

Technical Supply Specifications: RasunDrive® BallScrew 10mm - Type 14



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-001	Vacuum suitable		HV	
P-003	Ratio	i	120 : 1	
P-004	Self-locking		yes	
P-005	Travel range	s	20 mm	
P-008	Repeatability unidirectional		0.75 µm	
P-009	Repeatability bidirectional		3 µm	
P-010	Accuracy		20 µm	
P-012	Resolution		0.00814 µm	
P-014	Lost motion		15 µm	
P-015	Backlash		5 µm	
P-016	Rated force	F	50 N	
P-017	Peak force	F	50 N	
P-018	Momentary peak force	F	50 N	
P-023	Rated speed	v	1.38889 $\frac{\text{mm}}{\text{s}}$	
P-024	Maximum speed	v	6.94444 $\frac{\text{mm}}{\text{s}}$	
P-034	Lifetime for rated operation		500 h	
P-035	Radial backlash output shaft		0 µm	
P-036	Axial backlash output shaft		0 µm	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	
P-055	Moment of inertia	I	310.02 * 10 ⁻⁶ gcm ²	
P-056	Weight	m	14 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-20 °C	
P-058	Min. permissible ambient temperature (operating)	T	-10 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	125 °C	
P-060	Max. permissible ambient temperature (operating)	T	100 °C	

Motor data: Brushless DC-Servomotor 0824K006B

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-100	Motortype		EC	
P-102	Maximum speed of motor	n	90000 rpm	

Technical Supply Specifications: RasunDrive® BallScrew 10mm - Type 14



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-104	Speed constant of motor	K_n	5968 $\frac{\text{rpm}}{\text{V}}$	
P-106	Stall torque of motor	T	3.28 mNm	
P-107	Torque constant of motor	K_m	1.6 $\frac{\text{mNm}}{\text{A}}$	
P-108	No-load current of motor	I	55 mA	
P-110	Max. continuous current of motor	I	660 mA	1)
P-111	Rated voltage of motor	U	6 V	
P-112	Phase resistance of motor	R	2.91 ohm	
P-113	Inductance of motor	L	0.03 mH	
P-114	Amplitude BEMF of motor	U	0.168 mV/rpm	
P-118	Max. coil temperature of motor	T	125 °C	
P-119	Thermal resistance of motor between coil and housing	R_{th1}	11.2 $\frac{\text{K}}{\text{W}}$	
P-120	Thermal resistance of motor between housing and air	R_{th2}	55.2 $\frac{\text{K}}{\text{W}}$	
P-121	Thermal time constant of the coil of the motor	τ_{w1}	3500 ms	
P-122	Thermal time constant of the housing of the motor	τ_{w2}	112000 ms	

Encoder data

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-201	Impulses per revolution of encoder		1024	
P-202	Channels of encoder		A, B, I	
P-203	Frequency range of encoder	f	500 kHz	
P-204	Operating voltage of encoder	U	5 ±0.5 V	
P-205	Rated current consumption of encoder	I	max. 23	2)
P-206	Output current of encoder	I	4 mA	3)
P-207	Signal/phase shifting of encoder		90±75 °	4)
P-208	Signal build-up/decay time of encoder	t	0.1/0.1	

Data limit switch

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-302	Configuration Limit switches		n.c.	

Technical Supply Specifications:

RasuunDrive® BallScrew 10mm - Type 14



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Spindle data: Ball screw – 20 mm travel range pitch 1 mm 1112. /1.3.35.44R P5*
(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-402	Pitch	R	1 mm	

Material information

Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		Braycote601EF	
P-903	Lubrication of gear component set		Braycote601EF	
P-905	Lubrication of spindle-nut-system		NSK LGU	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-911	Material of bearing motor		Stainless steel	
P-912	Material of gearbox output side		1.4305 DIN EN	
P-914	Material of motor housing		Aluminium, black coated	
P-917	Material of spindle		1.4034	

2) Supply = 5V; unloaded outputs

3) Supply = 5V; low logic level <0.4V, high logic level >4.5V; CMOS and TTL compatible


4) At 5000 rpm

Technical Supply Specifications: RasunDrive® BallScrew 10mm - Type 14



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Technical drawing

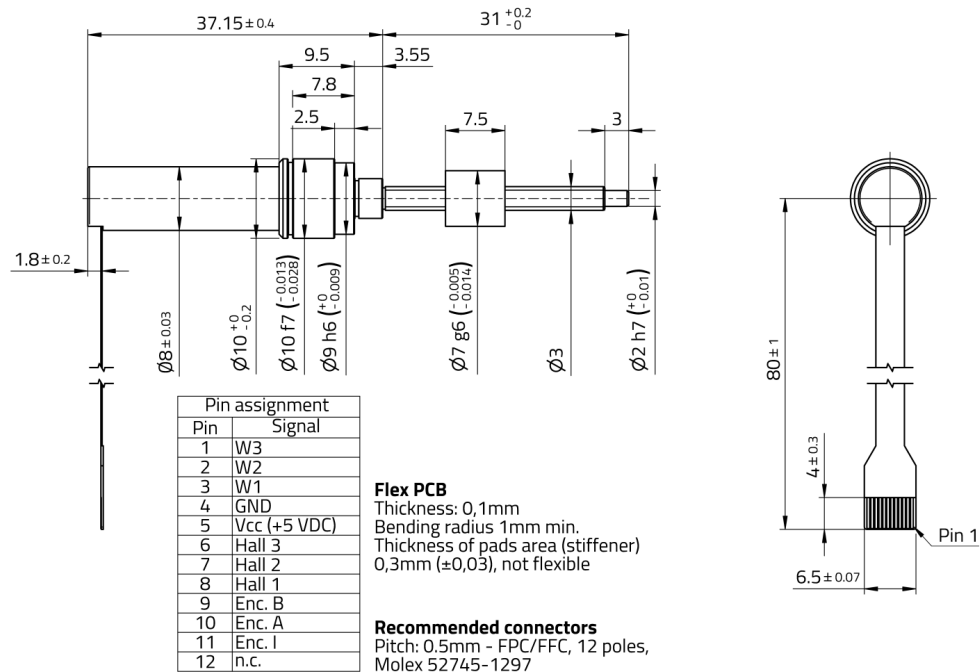

Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg
+49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com