




Attributes

Highlights	Description
<ul style="list-style-type: none"> ▪ Fast delivery ▪ High repeatability ▪ Zero backlash with high transmission ratio ▪ Vacuum suitable lubrication ▪ Preloaded ball bearing 	<p>Specially designed for use in ultra-high-vacuum environments: The MaalonDrive® UHV 10mm - type 2 micro positioning gear is characterised by its small outer dimensions and yet very high reduction ratio in a single stage. Both the input shaft as well as the output shaft are precisely guided by preloaded ball bearings, thereby making it possible to directly connect the application. A zero-backlash MaalonDrive® gear component set with a reduction ratio of 500:1 forms the core of this precise and high-reduction gear.</p>

Technical parameter

P-029

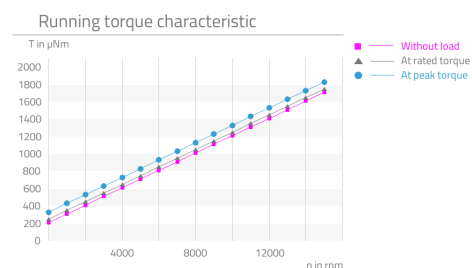

Technical Supply Specifications: MaalonDrive® UHV 10mm - Type 2



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-001	Vacuum suitable		UHV	
P-003	Ratio	i	500 : 1	
P-004	Self-locking		yes	
P-008	Repeatability unidirectional		15 arcsec	
P-009	Repeatability bidirectional		30 arcmin	
P-010	Accuracy		15 arcmin	
P-011	Transmission accuracy		30 arcmin	
P-013	Torsional stiffness		6.13 $\frac{\text{Nm}}{\text{rad}}$	
P-014	Lost motion		30 arcmin	
P-015	Backlash		0 arcmin	
P-016	Rated torque	T	4 mNm	
P-017	Peak torque	T	12 mNm	
P-018	Momentary peak torque	T	16 mNm	
P-021	Rated input speed	n	10000 rpm	
P-022	Maximum input speed	n	30000 rpm	
P-023	Rated output speed	n	20 rpm	
P-024	Maximum output speed	n	60 rpm	
P-026	No-load starting torque	T	315 μNm	
P-027	No-load running torque	T	210 μNm	
P-028	Rated running torque	T	1390 μNm	
P-034	Lifetime for rated operation		500 h	
P-035	Radial backlash output shaft		0 μm	
P-036	Axial backlash output shaft		0 μm	
P-037	Radial stiffness	c	2.3 $\text{N}/\mu\text{m}$	
P-038	Axial stiffness	c	40 $\frac{\text{N}}{\text{m}}$	
P-039	Max. radial load on output shaft (non-operating, constant load)	F	55 N	
P-040	Max. radial load on output shaft (non-operating, impulsive load)	F	18 N	
P-041	Max. radial load on output shaft (operating, constant load)	F	7 N	
P-042	Max. radial load on output shaft (operating, impulsive load)	F	7 N	
P-043	Max. axial load on output shaft (non-operating, constant)	F	150 N	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	

Technical Supply Specifications: MaalonDrive® UHV 10mm - Type 2



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-045	Max. axial load on output shaft (operating, constant load)	F	380 N	
P-046	Max. axial load on output shaft (operating, impulsive load)	F	127 N	
P-047	Max. radial load on input shaft (non-operating, constant load)	F	20 N	
P-048	Max. radial load on input shaft (non-operating, impulsive load)	F	6 N	
P-049	Max. radial load on input shaft (operating, constant load)	F	5 N	
P-050	Max. radial load on input shaft (operating, impulsive load)	F	5 N	
P-051	Max. axial load on input shaft (non-operating, constant load)	F	64 N	
P-052	Max. axial load on input shaft (non-operating, impulsive load)	F	20 N	
P-053	Max. axial load on input shaft (operating, constant load)	F	185 N	
P-054	Max. axial load on input shaft (operating, impulsive load)	F	66 N	
P-055	Moment of inertia	I	59 * 10 ⁻⁴ gcm ²	
P-056	Weight	m	6 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-80 °C	
P-058	Min. permissible ambient temperature (operating)	T	-10 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	150 °C	
P-060	Max. permissible ambient temperature (operating)	T	120 °C	

Material information

Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		Braycote601EF	
P-902	Lubrication of input bearing gearbox		Braycote601EF	
P-903	Lubrication of gear component set		Braycote601EF	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-910	Material of input bearing gearbox		1.4108 DIN EN	


Technical Supply Specifications: MaalonDrive® UHV 10mm - Type 2



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-912	Material of gearbox output side		1.4305 DIN EN	
P-913	Material of gearbox input side		1.4305 DIN EN	

Technical drawing

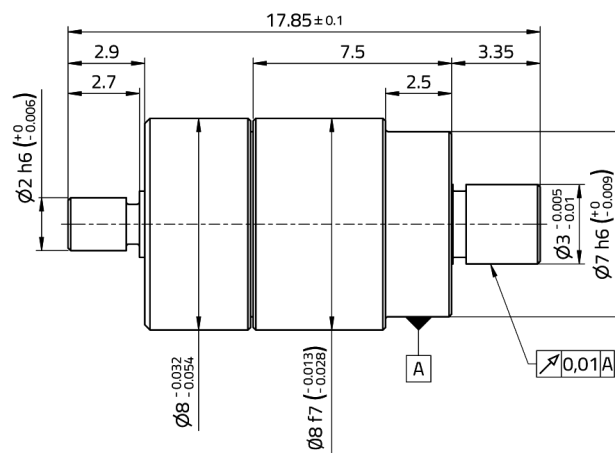

Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg
+49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com