

Attributes


Highlights	Description
<ul style="list-style-type: none">▪ Custom designed connecting flange▪ Zero backlash▪ Preloaded ball bearing▪ Zero backlash at high torque capacity▪ Compact build up	<p>Thanks to an application-optimised mounting flange the MaalonDrive® SpecialFlange 10mm - Type 1 represents a highly integrated miniaturized drive solution. Additionally, this micro positioning system stands out due to its high angular resolution, zero backlash, robust output bearing and excellent controllability - all in a very small space. The combination of a zero-backlash MaalonDrive® gear (reduction ratio of 120:1) with a DC motor (rated voltage of 12V) and an integrated encoder with a resolution of 256 pulses per rotation results in a high-performance, high-precision micro positioning system. Thanks to the preloaded output-side ball bearing, the application can be directly connected to the micro actuator.</p>

Technical parameter


The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com.

For further information please contact sales@micromotion.de.

P-019

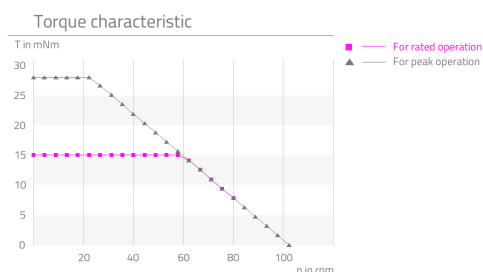

P-029

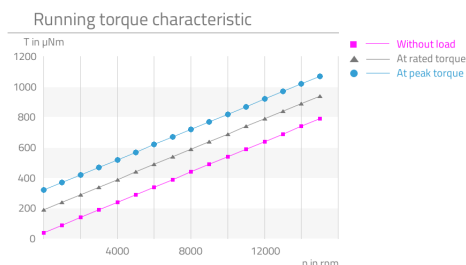

Nr.	Parameter	Symbol	Value	Hint
P-003	Ratio	i	120 : 1	
P-004	Self-locking		yes	
P-008	Repeatability unidirectional		10 arcsec	
P-009	Repeatability bidirectional		20 arcmin	
P-010	Accuracy		15 arcmin	
P-011	Transmission accuracy		30 arcmin	
P-012	Resolution		0.01172 °	
P-013	Torsional stiffness		2.77 $\frac{\text{Nm}}{\text{rad}}$	
P-014	Lost motion		20 arcmin	
P-015	Backlash		0 arcmin	
P-016	Rated torque	T	15 mNm	
P-017	Peak torque	T	28 mNm	
P-018	Momentary peak torque	T	70 mNm	
P-021	Rated input speed	n	10000 rpm	
P-022	Maximum input speed	n	16000 rpm	
P-023	Rated output speed	n	83.3333 rpm	
P-024	Maximum output speed	n	133.333 rpm	
P-026	No-load starting torque	T	60 µNm	
P-027	No-load running torque	T	40 µNm	

Technical Supply Specifications: MaalonDrive® SpecialFlange 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-028	Rated running torque	T	940 µNm	
P-034	Lifetime for rated operation		500 h	
P-035	Radial backlash output shaft		0 µm	
P-036	Axial backlash output shaft		0 µm	
P-037	Radial stiffness	c	2.3 N/µm	
P-038	Axial stiffness	c	40 N/µm	
P-039	Max. radial load on output shaft (non-operating, constant load)	F	55 N	
P-040	Max. radial load on output shaft (non-operating, impulsive load)	F	20 N	
P-041	Max. radial load on output shaft (operating, constant load)	F	7 N	
P-042	Max. radial load on output shaft (operating, impulsive load)	F	7 N	
P-043	Max. axial load on output shaft (non-operating, constant load)	F	150 N	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	
P-045	Max. axial load on output shaft (operating, constant load)	F	380 N	
P-046	Max. axial load on output shaft (operating, impulsive load)	F	127 N	
P-055	Moment of inertia	I	715 * 10 ⁻⁴ gcm ²	
P-056	Weight	m	12 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-30 °C	
P-058	Min. permissible ambient temperature (operating)	T	-20 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	85 °C	
P-060	Max. permissible ambient temperature (operating)	T	85 °C	

Motor data: DC-Motor 0816K0125R

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-100	Motortype		DC	
P-102	Maximum speed of motor	n	16000 rpm	
P-104	Speed constant of motor	Kn	1085 rpm/V	
P-106	Stall torque of motor	T	1 mNm	

Technical Supply Specifications: MaalonDrive® SpecialFlange 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-107	Torque constant of motor	Km	8.8 $\frac{\text{mNm}}{\text{A}}$	
P-108	No-load current of motor	I	3.9 mA	
P-110	Max. continuous current of motor	I	77 mA	1)
P-111	Rated voltage of motor	U	12 V	
P-112	Phase resistance of motor	R	101.8 ohm	
P-113	Inductance of motor	L	1.033 mH	
P-114	Amplitude BEMF of motor	U	0.922 mV/rpm	
P-118	Max. coil temperature of motor	T	85 °C	
P-119	Thermal resistance of motor between coil and housing	R _{th1}	20 $\frac{\text{K}}{\text{W}}$	
P-120	Thermal resistance of motor between housing and air	R _{th2}	48 $\frac{\text{K}}{\text{W}}$	
P-121	Thermal time constant of the coil of the motor	T _{w1}	4200 ms	
P-122	Thermal time constant of the housing of the motor	T _{w2}	242000 ms	

Encoder data

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-201	Impulses per revolution of encoder		256	
P-202	Channels of encoder		A, B, I	
P-203	Frequency range of encoder	f	128 kHz	
P-204	Operating voltage of encoder	U	3.3 ±0.3 V	
P-205	Rated current consumption of encoder	I	16 mA	
P-206	Output current of encoder	I	2 mA	
P-207	Signal/phase shifting of encoder		90±45 °	
P-208	Signal build-up/decay time of encoder	t	0.1/0.1	

Material information

Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		Longtime PD2	
P-903	Lubrication of gear component set		Molykote BR 2 plus	

Technical Supply Specifications: MaalonDrive® SpecialFlange 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-911	Material of bearing motor		Stainless steel	
P-912	Material of gearbox output side		1.4305 DIN EN	
P-914	Material of motor housing		Steel, nickel-plated	

Technical drawing

