




Attributes

Highlights	Description
<ul style="list-style-type: none"> ▪ High speed ▪ Easy controllability ▪ Preloaded ball bearing ▪ Lifetime lubrication ▪ Use of high quality materials 	<p>The CoograDrive® SpecialFlange 10mm - type 1 micro servo actuator is driven by a DC motor with rated voltage of 12V and integrated encoder with a resolution of 256 pulses per rotation. At the heart of this durable micro positioning system is a low-backlash CoograDrive® gear with a reduction ratio of 40:1. Three axial threads serve as the mechanical interface for attaching the micro servo actuator. The application can be directly connected by means of the preloaded ball bearings on the output shaft.</p>


Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com. For further information please contact sales@micromotion.de.

P-019

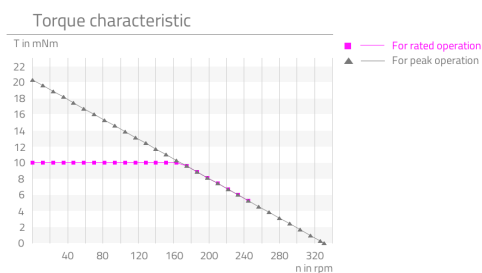

P-029

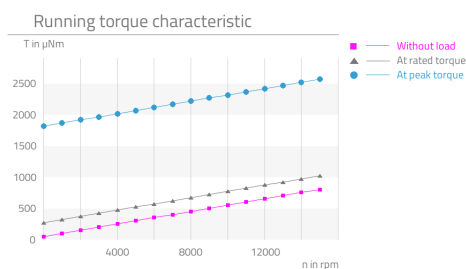

Technical Supply Specifications: CoograDrive® SpecialFlange 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-003	Ratio	i	40 : 1	
P-004	Self-locking		yes	
P-008	Repeatability unidirectional		3 arcmin	
P-009	Repeatability bidirectional		30 arcmin	
P-010	Accuracy		30 arcmin	
P-011	Transmission accuracy		60 arcmin	
P-012	Resolution		0.03516 °	
P-013	Torsional stiffness		2.50 $\frac{\text{Nm}}{\text{rad}}$	
P-014	Lost motion		30 arcmin	
P-015	Backlash		20 arcmin	
P-016	Rated torque	T	10 mNm	
P-017	Peak torque	T	80 mNm	
P-018	Momentary peak torque	T	100 mNm	
P-021	Rated input speed	n	10000 rpm	
P-022	Maximum input speed	n	14000 rpm	
P-023	Rated output speed	n	250 rpm	
P-024	Maximum output speed	n	350 rpm	
P-026	No-load starting torque	T	82.5 μNm	
P-027	No-load running torque	T	55 μNm	
P-028	Rated running torque	T	705 μNm	
P-034	Lifetime for rated operation		500 h	
P-035	Radial backlash output shaft		0 μm	
P-036	Axial backlash output shaft		0 μm	
P-037	Radial stiffness	c	2.3 $\text{N}/\mu\text{m}$	
P-038	Axial stiffness	c	40 $\text{N}/\mu\text{m}$	
P-039	Max. radial load on output shaft (non-operating, constant load)	F	55 N	
P-040	Max. radial load on output shaft (non-operating, impulsive load)	F	20 N	
P-041	Max. radial load on output shaft (operating, constant load)	F	7 N	
P-042	Max. radial load on output shaft (operating, impulsive load)	F	7 N	
P-043	Max. axial load on output shaft (non-operating, constant)	F	150 N	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	

Technical Supply Specifications: CoograDrive® SpecialFlange 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-045	Max. axial load on output shaft (operating, constant load)	F	380 N	
P-046	Max. axial load on output shaft (operating, impulsive load)	F	127 N	
P-055	Moment of inertia	I	$742.03 \cdot 10^{-4}$ gcm ²	
P-056	Weight	m	4.1 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-20 °C	
P-058	Min. permissible ambient temperature (operating)	T	-20 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	85 °C	
P-060	Max. permissible ambient temperature (operating)	T	65 °C	

Motor data: DC-Motor RE 10 12V 0.75W

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-100	Motortype		DC	
P-102	Maximum speed of motor	n	14000 rpm	
P-104	Speed constant of motor	Kn	1000 $\frac{\text{rpm}}{\text{V}}$	
P-106	Stall torque of motor	T	1.01 mNm	
P-107	Torque constant of motor	Km	9.55 $\frac{\text{mNm}}{\text{A}}$	
P-108	No-load current of motor	I	5.37 mA	
P-110	Max. continuous current of motor	I	81 mA	
P-111	Rated voltage of motor	U	12 V	
P-112	Phase resistance of motor	R	114 ohm	
P-113	Inductance of motor	L	0.92 mH	
P-114	Amplitude BEMF of motor	U	1 mV/rpm	
P-118	Max. coil temperature of motor	T	85 °C	
P-119	Thermal resistance of motor between coil and housing	R _{th1}	19.5 $\frac{\text{K}}{\text{W}}$	
P-120	Thermal resistance of motor between housing and air	R _{th2}	45.5 $\frac{\text{K}}{\text{W}}$	
P-121	Thermal time constant of the coil of the motor	T _{w1}	3160 ms	
P-122	Thermal time constant of the housing of the motor	T _{w2}	108000 ms	

Technical Supply Specifications: CoograDrive® SpecialFlange 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Encoder data

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-201	Impulses per revolution of encoder		256	
P-202	Channels of encoder		A, A\, B, B\	
P-203	Frequency range of encoder	f	320 kHz	
P-204	Operating voltage of encoder	U	5 ±0.2 V	
P-206	Output current of encoder	I	5 mA	
P-207	Signal/phase shifting of encoder		90±45 °	

Material information


Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		Longtime PD2	
P-903	Lubrication of gear component set		Molykote BR 2 plus	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-911	Material of bearing motor		Stainless steel	
P-912	Material of gearbox output side		1.4305 DIN EN	
P-914	Material of motor housing		Steel, black coated	

Technical Supply Specifications: CoograDrive® SpecialFlange 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Technical drawing

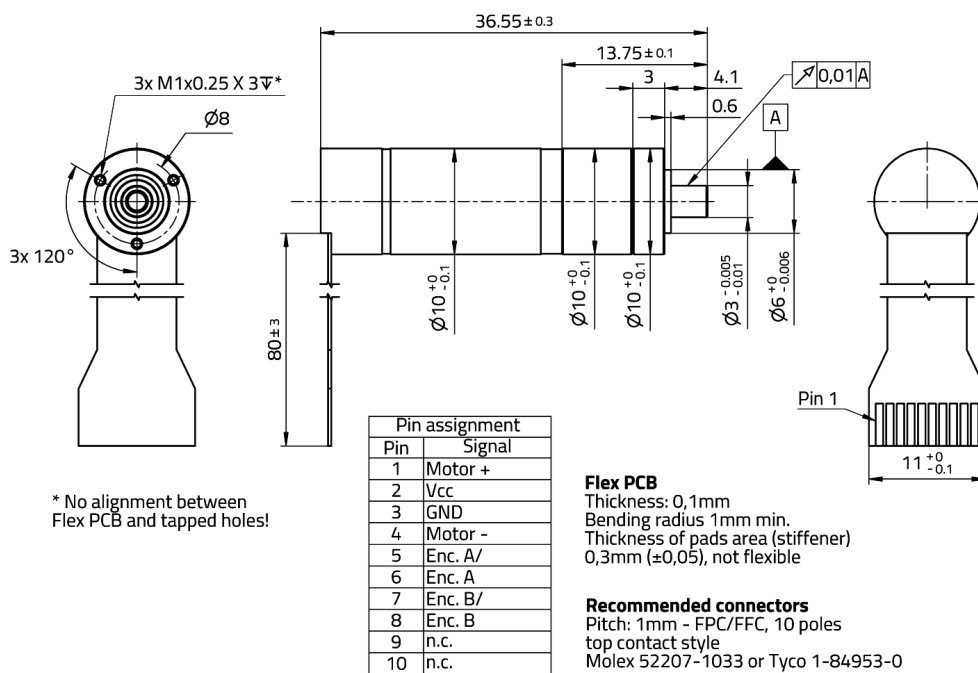

Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg
+49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com