




Attributes

Highlights	Description
<ul style="list-style-type: none"> ▪ Fast delivery ▪ High repeatability ▪ Zero backlash with optimised fit between speed and transmission ratio ▪ Hollow shaft thru center of rotational axis ▪ Preloaded ball bearing 	<p>The MaalonDrive® Hollow 10mm - type 3 micro positioning gear enables an especially simple and space-saving design of the application, as optical or electrical signals can be guided through the provided hollow shaft. At the heart of this precise and reliable micro gearbox is a zero-backlash MaalonDrive® gear with a reduction ratio of 160:1 and IH-tooth profile. Input and output shaft are precisely guided by preloaded ball bearings, thereby allowing the application to be directly connected.</p>

Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com.
 For further information please contact sales@micromotion.de.

P-029

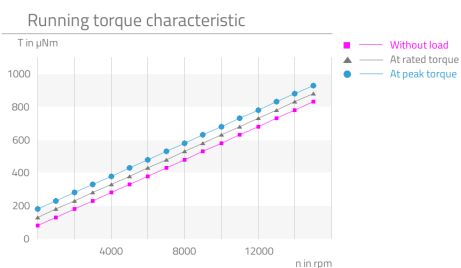

Technical Supply Specifications: MaalonDrive® Hollow 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-003	Ratio	i	160 : 1	
P-004	Self-locking		yes	
P-006	Hollow shaft		ja	
P-008	Repeatability unidirectional		15 arcsec	
P-009	Repeatability bidirectional		20 arcmin	
P-010	Accuracy		12 arcmin	
P-011	Transmission accuracy		24 arcmin	
P-013	Torsional stiffness		8.25 $\frac{\text{Nm}}{\text{rad}}$	
P-014	Lost motion		12 arcmin	
P-015	Backlash		0 arcmin	
P-016	Rated torque	T	5 mNm	
P-017	Peak torque	T	10 mNm	
P-018	Momentary peak torque	T	23 mNm	
P-021	Rated input speed	n	10000 rpm	
P-022	Maximum input speed	n	30000 rpm	
P-023	Rated output speed	n	62.5 rpm	
P-024	Maximum output speed	n	187.5 rpm	
P-026	No-load starting torque	T	120 μNm	
P-027	No-load running torque	T	80 μNm	
P-028	Rated running torque	T	645 μNm	
P-034	Lifetime for rated operation		1000 h	
P-035	Radial backlash output shaft		0 μm	
P-036	Axial backlash output shaft		0 μm	
P-037	Radial stiffness	c	2.3 $\text{N}/\mu\text{m}$	
P-038	Axial stiffness	c	40 $\frac{\text{N}}{\mu\text{m}}$	
P-039	Max. radial load on output shaft (non-operating, constant load)	F	55 N	
P-040	Max. radial load on output shaft (non-operating, impulsive load)	F	20 N	
P-041	Max. radial load on output shaft (operating, constant load)	F	7 N	
P-042	Max. radial load on output shaft (operating, impulsive load)	F	7 N	
P-043	Max. axial load on output shaft (non-operating, constant load)	F	150 N	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	

Technical Supply Specifications: MaalonDrive® Hollow 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-045	Max. axial load on output shaft (operating, constant load)	F	380 N	
P-046	Max. axial load on output shaft (operating, impulsive load)	F	127 N	
P-047	Max. radial load on input shaft (non-operating, constant load)	F	15 N	
P-048	Max. radial load on input shaft (non-operating, impulsive load)	F	6 N	
P-049	Max. radial load on input shaft (operating, constant load)	F	6 N	
P-050	Max. radial load on input shaft (operating, impulsive load)	F	6 N	
P-051	Max. axial load on input shaft (non-operating, constant load)	F	64 N	
P-052	Max. axial load on input shaft (non-operating, impulsive load)	F	20 N	
P-053	Max. axial load on input shaft (operating, constant load)	F	185 N	
P-054	Max. axial load on input shaft (operating, impulsive load)	F	66 N	
P-055	Moment of inertia	I	60 * 10 ⁻⁴ gcm ²	
P-056	Weight	m	6 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-80 °C	
P-058	Min. permissible ambient temperature (operating)	T	-20 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	150 °C	
P-060	Max. permissible ambient temperature (operating)	T	120 °C	

Material information

Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		Longtime PD2	
P-902	Lubrication of input bearing gearbox		Longtime PD2	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-910	Material of input bearing gearbox		1.4108 DIN EN	
P-912	Material of gearbox output side		1.4305 DIN EN	



Technical Supply Specifications: MaalonDrive® Hollow 10mm - Type 3



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-913	Material of gearbox input side		1.4305 DIN EN	

Technical drawing

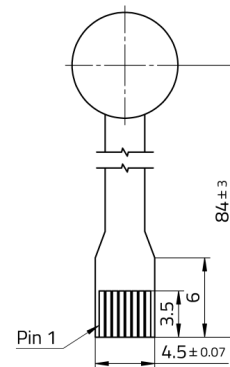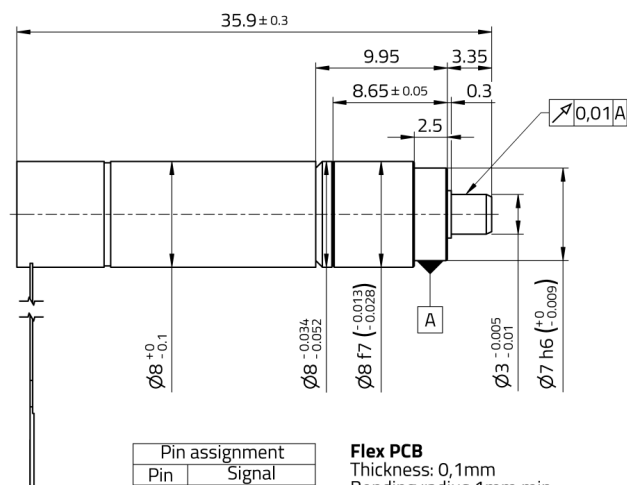

Pin assignment	
Pin	Signal
1	Motor +
2	Vcc
3	GND
4	Motor -
5	Enc. A/
6	Enc. A
7	Enc. B/
8	Enc. B

Flex PCB
Thickness: 0,1mm
Bending radius 1mm min.
Thickness of pads area (stiffener)
0,3mm (±0,05), not flexible

Recommended connectors
Pitch: 0,5mm - FPC/FFC, 8 poles
Molex 52745-0833



Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg
+49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com