



Attributes


Highlights	Description
<ul style="list-style-type: none">▪ Wide travel range▪ Dry lubrication due to coatings▪ Zero backlash at optimised fit between speed and resolution▪ Integrated limit switches▪ Easy controllability	<p>The RasuunDrive® HighTemp 10mm - type 1 micro linear actuator system is a dry-lubricated system with a travel range of 40 mm. Combined with a stepper motor with 20 steps per rotation is an encoder with a resolution of ten pulses per rotation. Directly connected to the motor is a low-backlash CoograDrive® gear with a reduction ratio of 40:1 and a spring-loaded, zero-backlash spindle nut system with a pitch of 0.4 mm. The end positions are monitored by two magnetoresistive limit sensors. The mechanical interface for attaching the micro linear actuator system is a centring collar with a diameter of 6 g6; the load is connected via an M3x3.5 thread.</p>

Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com.

For further information please contact sales@micromotion.de.

P-019 Curve measured with 5x nominal voltage and load inertia $6 \cdot 10^{-9}$ kg/m² in $\frac{1}{4}$ micro steps.

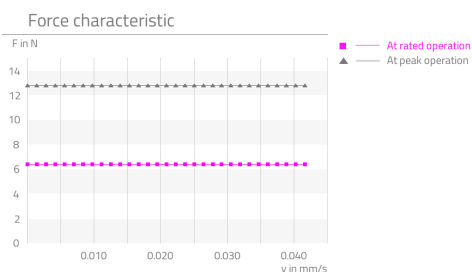

Nr.	Parameter	Symbol	Value	Hint
P-001	Vacuum suitable		UHV	
P-003	Ratio	i	160 : 1	
P-004	Self-locking		yes	
P-005	Travel range	s	40 mm	
P-008	Repeatability unidirectional		2 µm	
P-009	Repeatability bidirectional		10 µm	
P-010	Accuracy		20 µm	
P-012	Resolution		0.125 µm	
P-014	Lost motion		10 µm	
P-015	Backlash		0 µm	
P-016	Rated force	F	6.40529 N	
P-017	Peak force	F	12.8106 N	
P-018	Momentary peak force	F	29.4643 N	
P-023	Rated speed	v	0.04167 ^{mm} / _s	
P-024	Maximum speed	v	0.04167 ^{mm} / _s	
P-034	Lifetime for rated operation		200 h	
P-035	Radial backlash output shaft		0 µm	
P-036	Axial backlash output shaft		0 µm	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	

Technical Supply Specifications: RasuunDrive® HighTemp 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-055	Moment of inertia	I	1823 * 10 ⁻⁴ gcm ²	
P-056	Weight	m	30.47 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-35 °C	
P-058	Min. permissible ambient temperature (operating)	T	-35 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	130 °C	
P-060	Max. permissible ambient temperature (operating)	T	70 °C	

Additional technical data:

- 2 digital limit sensors integrated

Motor data: Stepper AM 1020-2R-A0.25

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-100	Motortype		Stepper	
P-102	Maximum speed of motor	n	21000 rpm	
P-103	Resonance frequency of motor	f	140 Hz	
P-105	Holding torque of motor (unpowered)	T	0.2 mNm	
P-109	Rated current of motor	I	250 mA	
P-111	Rated voltage of motor	U	2 V	
P-112	Phase resistance of motor	R	8 ohm	
P-113	Inductance of motor	L	2.4 mH	
P-114	Amplitude BEMF of motor	U	0.6 mV/rpm	
P-115	Full step angle of motor		18 °	
P-116	Angular accuracy of step of motor		±1.8 °	
P-117	Electrical time constant of motor	t	0.32 ms	
P-118	Max. coil temperature of motor	T	130 °C	
P-119	Thermal resistance of motor between coil and housing	R _{th1}	3.9 °/W	
P-120	Thermal resistance of motor between housing and air	R _{th2}	53.8 °/W	
P-121	Thermal time constant of the coil of the motor	τ _{w1}	3200 ms	
P-122	Thermal time constant of the housing of the motor	τ _{w2}	200000 ms	
P-123	Insulation voltage of motor	U	200 V	

Technical Supply Specifications: RasunDrive® HighTemp 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Encoder data

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-201	Impulses per revolution of encoder		10	
P-202	Channels of encoder		A, B	
P-203	Frequency range of encoder	f	7.2 kHz	
P-204	Operating voltage of encoder	U	5 ±0.5 V	
P-205	Rated current consumption of encoder	I	5 mA	
P-207	Signal/phase shifting of encoder		90±45 °	
P-208	Signal build-up/decay time of encoder	t	5 / 0.2	

Data limit switch

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-302	Configuration Limit switches		n.c.	

Spindle data: Spindle unit MLP-10-SPM0047 – 40 mm travel range

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-402	Pitch	R	0.4 mm	

Data linear bearing Lsag4 UHV

(Data are provided by the manufacturer or are based on the data sheets of the manufacturer)

Nr.	Parameter	Symbol	Value	Hint
P-601	Max. lateral force in y-direction (non-operating, constant load)	F	5 N	

Material information

Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		MoS ₂ (drylubrication)	
P-903	Lubrication of gear component set		DICRONITE®/MoS ₂ (drylubrication)	

Technical Supply Specifications: RasuunDrive® HighTemp 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de


Nr.	Parameter	Symbol	Value	Hint
P-904	Lubrication of bearing motor		MoS ₂ (drylubrication)	
P-905	Lubrication of spindel-nut-system		MoS ₂ (drylubrication)	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-911	Material of bearing motor		Stainless steel	
P-912	Material of gearbox output side		1.4305 DIN EN	
P-914	Material of motor housing		Anodized aluminum	
P-917	Material of spindle		1.4104	

Technical Supply Specifications: RasuunDrive® HighTemp 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Technical drawing

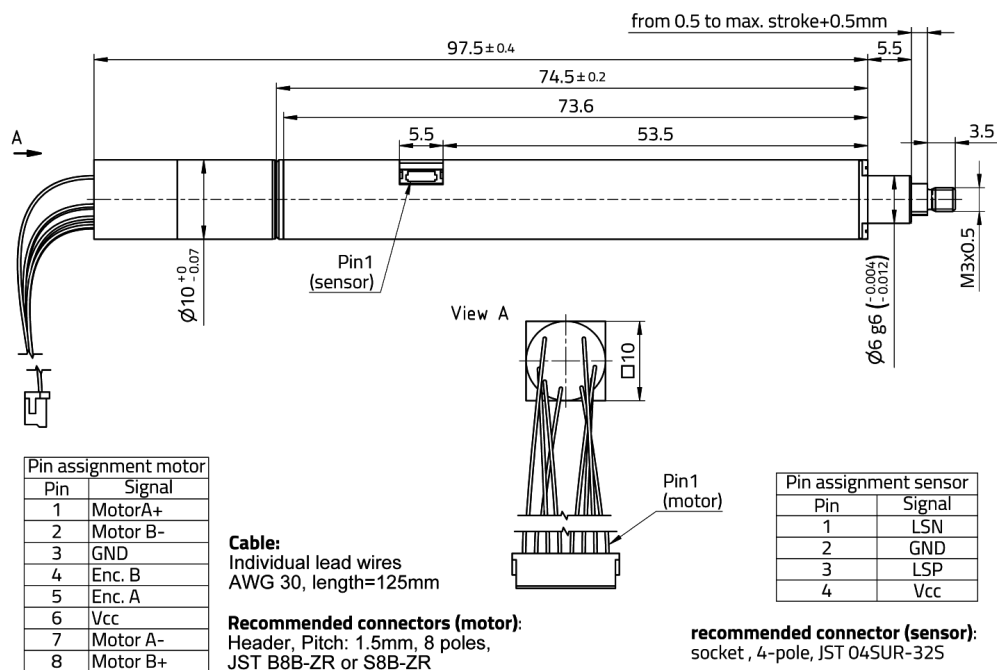

Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg
+49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com