



Attributes


Highlights	Description
<ul style="list-style-type: none">▪ Dry lubrication due to coatings▪ High repeatability▪ Zero backlash with high transmission ratio▪ Suitable in wide temperature range▪ Preloaded ball bearing	<p>The MaalonDrive® Cryo 10mm - type 1 micro gearbox makes full use of its strengths even at very low temperatures thanks to the dry lubrication and materials that are used. The high-reduction micro positioning system relies on a precise, zero-backlash MaalonDrive® gear with a reduction ratio of 500:1 and is equipped with a preloaded ball bearing on the output side to which the application can be directly connected.</p>

Technical parameter

The stated values are based on calculations and measurements by Micromotion GmbH, carried out according to the current state of the art. You can find our definitions at www.micromotion-drives.com.

For further information please contact sales@micromotion.de.

P-029

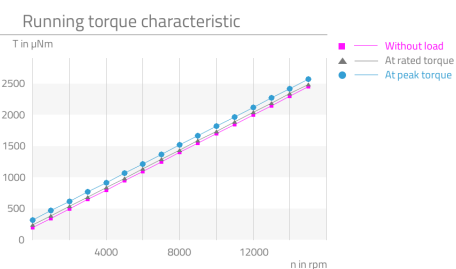

Technical Supply Specifications: MaalonDrive® Cryo 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-001	Vacuum suitable		UHV	
P-003	Ratio	i	500 : 1	
P-004	Self-locking		yes	
P-008	Repeatability unidirectional		20 arcsec	
P-009	Repeatability bidirectional		40 arcmin	
P-010	Accuracy		15 arcmin	
P-011	Transmission accuracy		30 arcmin	
P-013	Torsional stiffness		6.13 $\frac{\text{Nm}}{\text{rad}}$	
P-014	Lost motion		40 arcmin	
P-015	Backlash		0 arcmin	
P-016	Rated torque	T	4 mNm	
P-017	Peak torque	T	12 mNm	
P-018	Momentary peak torque	T	16 mNm	
P-023	Rated output speed	n	0 rpm	
P-024	Maximum output speed	n	0 rpm	
P-026	No-load starting torque	T	292.5 μNm	
P-027	No-load running torque	T	195 μNm	
P-028	Rated running torque	T	1905 μNm	
P-034	Lifetime for rated operation		200 h	
P-035	Radial backlash output shaft		0 μm	
P-036	Axial backlash output shaft		0 μm	
P-037	Radial stiffness	c	1.35 $\text{N}/\mu\text{m}$	
P-038	Axial stiffness	c	40 $\frac{\text{N}}{\mu\text{m}}$	
P-039	Max. radial load on output shaft (non-operating, constant load)	F	40 N	
P-040	Max. radial load on output shaft (non-operating, impulsive load)	F	15 N	
P-041	Max. radial load on output shaft (operating, constant load)	F	5 N	
P-042	Max. radial load on output shaft (operating, impulsive load)	F	5 N	
P-043	Max. axial load on output shaft (non-operating, constant load)	F	150 N	
P-044	Max. axial load on output shaft (non-operating, impulsive load)	F	50 N	
P-045	Max. axial load on output shaft (operating, constant load)	F	380 N	

Technical Supply Specifications: MaalonDrive® Cryo 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-046	Max. axial load on output shaft (operating, impulsive load)	F	127 N	
P-047	Max. radial load on input shaft (non-operating, constant load)	F	20 N	
P-048	Max. radial load on input shaft (non-operating, impulsive load)	F	6 N	
P-049	Max. radial load on input shaft (operating, constant load)	F	5 N	
P-050	Max. radial load on input shaft (operating, impulsive load)	F	5 N	
P-051	Max. axial load on input shaft (non-operating, constant load)	F	64 N	
P-052	Max. axial load on input shaft (non-operating, impulsive load)	F	20 N	
P-053	Max. axial load on input shaft (operating, constant load)	F	185 N	
P-054	Max. axial load on input shaft (operating, impulsive load)	F	66 N	
P-055	Moment of inertia	I	$59 * 10^{-4} \text{ gcm}^2$	
P-056	Weight	m	6 g	
P-057	Min. permissible ambient temperature (non-operating)	T	-250 °C	
P-058	Min. permissible ambient temperature (operating)	T	-200 °C	
P-059	Max. permissible ambient temperature (non-operating)	T	150 °C	
P-060	Max. permissible ambient temperature (operating)	T	120 °C	

Material information

Nr.	Parameter	Symbol	Value	Hint
P-900	RoHS compliant		yes	
P-901	Lubrication of output bearing gearbox		MoS ₂ (drylubrication)	
P-902	Lubrication of input bearing gearbox		MoS ₂ (drylubrication)	
P-903	Lubrication of gear component set		DICRONITE®/MoS ₂ (drylubrication)	
P-908	Material of gear component set		NiFe	
P-909	Material of output bearing gearbox		1.4108 DIN EN	
P-910	Material of input bearing gearbox		1.4108 DIN EN	


Technical Supply Specifications: MaalonDrive® Cryo 10mm - Type 1



Micromotion GmbH, Phone: +49 (0) 6431 – 569 18 – 25, E-mail: sales@micromotion.de

Nr.	Parameter	Symbol	Value	Hint
P-912	Material of gearbox output side		1.4305 DIN EN	
P-913	Material of gearbox input side		1.4305 DIN EN	

Technical drawing

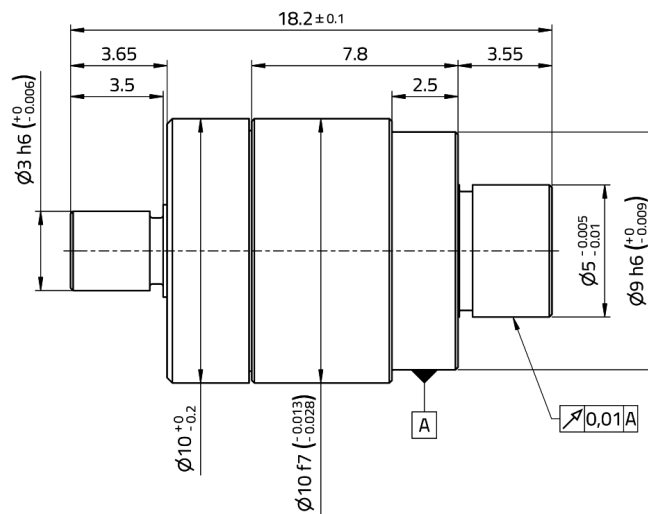

Micromotion GmbH | Hoenbergstraße 14 | 65555 Limburg
+49(0)6431-59618-25 | sales@micromotion.de | www.micromotion-drives.com